

Technical Data Sheet


UNITUBE SM 2F, 4F, 6F, 12F G.652D

Un-Armoured OPTICAL FIBRE CABLE

Construction Details

No of Fiber and Color	: 02F per Tube - Blue, Natural. : 04F per Tube - Blue, Orange, Green and Natural. : 06F per Tube - Blue, Orange, Green, Brown, Gray and Natural. : 12F per Tube - Blue, Orange, Green, Brown, Gray, White, Red, Black, Yellow, Violet, Pink and Natural.
FRP	: UV-Cured Coated FRP
Loose Tube	: PBT Loose Tube Filled With Thixotropic Jelly
HDPE Coating	: Virgin HDPE
Lining Option	: (i) L1 Black Line on Orange Cable (ii) L2 Orange Line on Black Cable
Yarn Count	: 1200 tex
No of Loose Tube	: 1 Loose Tube
Tube Identification	: Natural
Strength Member	: 2/3 Nos. (0.8mm / 1mm) - FRP Embedded in Sheath
Outer Jacket	: PE Black/Orange Color

Schematic Diagram Not to Scale

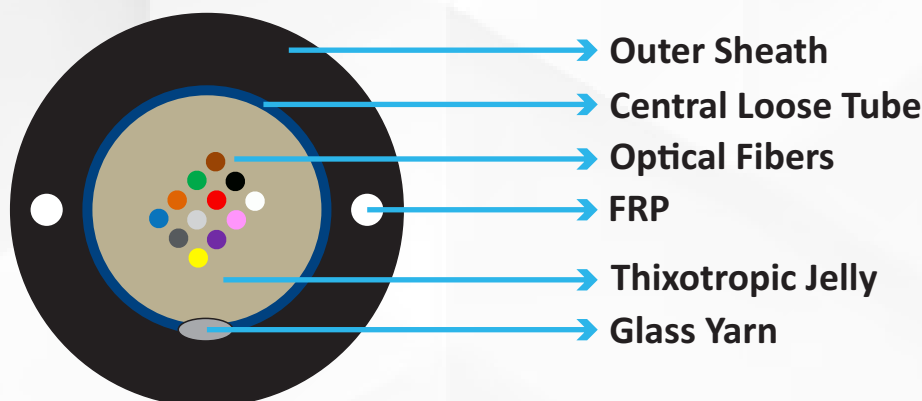

Fibre Characteristics (As per ITU-T Rec. G. 652 D)

Attenuation (Transmission Characteristics)		Geometrical Characteristics	
@ 1310 nm	: ≤ 0.4 (dB/Km)	Mode Field Diameter @ 1310 nm	: $9.2 \pm 0.4 \mu\text{m}$
@ 1550 nm	: ≤ 0.2 (dB/Km)	Mode Field Diameter @ 1550 nm	: $10.3 \pm 0.5 \mu\text{m}$
Dispersion		Cladding Diameter	: $125 \pm 1 \mu\text{m}$
A. Total Dispersion (Chromatic Dispersion)		Cladding Non Circularity	: $\leq 1\%$
1285-1330nm	: ≤ 3.5 ps/nm.km	Core Clad Concentricity Error	: $\leq 0.5 \mu\text{m}$
1270-1340nm	: ≤ 5.3 ps/nm.km	Coating Diameter(Uncolored)	: $245 \pm 10 \mu\text{m}$
1550nm	: ≤ 18 ps/nm.km	Coating/Cladding Concentricity	: $\leq 12 \mu\text{m}$
1625nm	: ≤ 22.0 ps/nm.km	Cut Off Wavelength	
B. Polarization Mode Dispersion at 1310 & 1550 nm		Fiber Cut Off Wavelength	: ≤ 1320 nm
At Fibre Stage	: ≤ 0.2 ps/sqrt.km	Cable Cut Off Wavelength	: ≤ 1260 nm
At Cable Stage	: ≤ 0.3 ps/sqrt.km	Mechanical & Operating Characteristics	
C. Dispersion Slope & Wave Length		Operating Temperature	: -20°C to $+70^\circ\text{C}$
Zero Dispersion Wavelength	: 1300-1324 nm	Fibre Proof Test	: 1%
Zero Dispersion Slope	: ≤ 0.092 ps/nm ² .km	Stripability Force	: $1.3 < F < 8.9$ N
Cable Mechanical & Physical Characteristics		Fibre Curl	: 4 meter radius of curvature

Cable Mechanical & Physical Characteristics

Cable Mechanical Characteristics		Cable Physical Characteristics	
Max. Tensile Strength	: 350 N (Short Term)	Cable Diameter	: 5.8mm / 6mm / 6.5mm / 7mm
Crush Resistance	: 1000 N/10 CM (Short Term)	Nominal Cable Weight	: Approx. 28 kg/km
Impact Resistance	: 10 N 0.5 m	Packing Length	: $1/2$ km $\pm 5\%$
Min. Bending Radius (Long Term)	: 20D (D= Cable Diameter mm)	Packing Details	: Coil Form

All Tests Shall be Carried out as per IEC Standards. Change in attenuation Shall be ≤ 0.05 dB/km

Cable Printing Details:
(Hot Foil White Emb.)

OFC wwY OPTRONIX PLATINUM xxF DC CFRP YW12 UT SM G652D Month YYYY Length Code Meter Marking
Note: ww will be replaced with outer diameter of 58, 60, 65, 70.
xx will be replaced with Fiber Count 02, 04, 06, 12.


Technical Data Sheet

UNITUBE SM 2F, 4F, 6F, 12F G.652D

Un-Armoured OPTICAL FIBRE CABLE

Construction Details	
No of Fiber and Color	: 02F per Tube - Blue, Natural.
	: 04F per Tube - Blue, Orange, Green and Natural.
	: 06F per Tube - Blue, Orange, Green, Brown, Gray and Natural.
	: 12F per Tube - Blue, Orange, Green, Brown, Gray, White, Red, Black, Yellow, Violet, Pink and Natural.
FRP	: UV Coated Dual FRP
Loose Tube	: PBT Loose Tube Filled With Thixotropic Jelly
HDPE Coating	: Virgin HDPE (Orange or Black)
Lining Option	: (i) L1 Black Line on Orange Cable (ii) L2 Orange Line on Black Cable
Yarn Count	: 1200 tex
No of Loose Tube	: 1 Loose Tube
Tube Identification	: Natural
Strength Member	: 2 Nos. (0.8mm / 1mm) - FRP Embedded in Sheath
Outer Jacket	: PE Black Color

Schematic Diagram Not to Scale

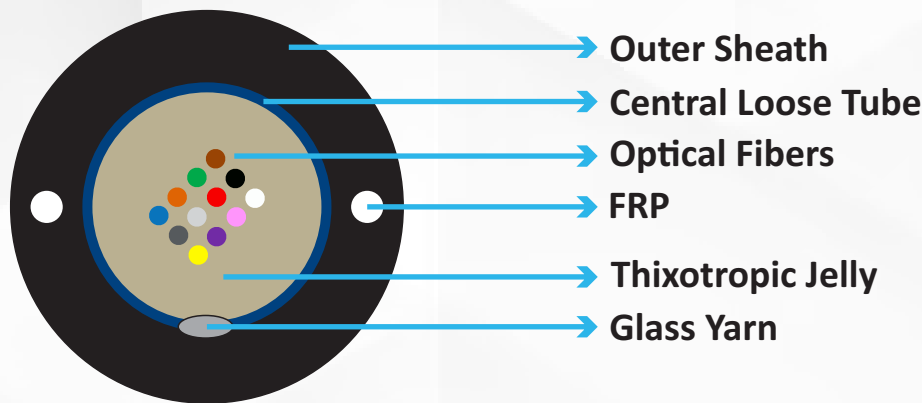

Fibre Characteristics (As per ITU-T Rec. G. 652 D)

Attenuation (Transmission Characteristics)		Geometrical Characteristics	
@ 1310 nm	: ≤ 0.4 (dB/Km)	Mode Field Diameter @ 1310 nm	: $9.2 \pm 0.4 \mu\text{m}$
@ 1550 nm	: ≤ 0.2 (dB/Km)	Mode Field Diameter @ 1550 nm	: $10.3 \pm 0.5 \mu\text{m}$
Dispersion		Cladding Diameter	: $125 \pm 1 \mu\text{m}$
		Cladding Non Circularity	: $\leq 1\%$
A. Total Dispersion (Chromatic Dispersion)		Core Clad Concentricity Error	: $\leq 0.5 \mu\text{m}$
1285-1330nm	: ≤ 3.5 ps/nm.km	Coating Diameter(Uncolored)	: $245 \pm 10 \mu\text{m}$
1270-1340nm	: ≤ 5.3 ps/nm.km	Coating/Cladding Concentricity	: $\leq 12 \mu\text{m}$
1550nm	: ≤ 18 ps/nm.km	Cut Off Wavelength	
1625nm	: ≤ 22.0 ps/nm.km	Fiber Cut Off Wavelength	: ≤ 1320 nm
B. Polarization Mode Dispersion at 1310 & 1550 nm		Cable Cut Off Wavelength	: ≤ 1260 nm
At Fibre Stage	: ≤ 0.2 ps/sqrt.km	Mechanical & Operating Characteristics	
At Cable Stage	: ≤ 0.3 ps/sqrt.km	Operating Temperature	: -20°C to $+70^\circ\text{C}$
C. Dispersion Slope & Wave Length		Fibre Proof Test	: 1%
Zero Dispersion Wavelength	: 1300-1324 nm	Stripability Force	: $1.3 < F < 8.9$ N
Zero Dispersion Slope	: ≤ 0.092 ps/nm ² .km	Fibre Curl	: 4 meter radius of curvature

Cable Mechanical & Physical Characteristics

Cable Mechanical Characteristics		Cable Physical Characteristics	
Max. Tensile Strength	: 350 N (Short Term)	Cable Diameter	: 5.8mm / 6mm / 6.5mm / 7mm
Crush Resistance	: 1000 N/10 CM (Short Term)	Nominal Cable Weight	: Approx. 28 kg/km
Impact Resistance	: 10 N 0.5 m	Packing Length	: $2.0 \text{ km} \pm 5\%$
Min. Bending Radius (Long Term)	: 20D (D= Cable Diameter mm)	Packing Details	: Coil Form

All Tests Shall be Carried out as per IEC Standards. Change in attenuation Shall be ≤ 0.05 dB/km

Cable Printing Details:
(Hot Foil White Emb.)