

Handheld fiber cleaver

S-70



S-70

Handheld fiber cleaver





One hand operation

Approx. 260g
58(W)×98(D)×49(H) mm

Automatic blade rotation

Patented mechanism,
repeatable quality cleaves
without blade adjustment

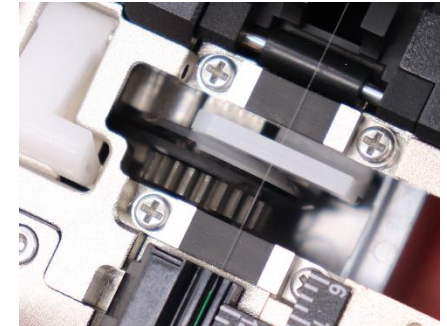

High precision, durable blade



Our expert metal working
delivers consistent quality
for over 60,000 fiber.



User friendly functions

Improve your field efficiency by

- Large capacity off-cut collector
- Selectable lid opening angle



Large



Narrow



Wide

Specifications

Item		S-70
Applicable fiber	Material	Silica glass
	Cladding diameter	Φ 125 μm
	Fiber count	Single
Cleave length*1		6~20mm (Φ 0.25) 10~20mm (Φ 0.9)
Fiber placing		Single fiber adapter AP-FC7(A)
Cleave angle (Typ.)		0.5 degrees with single fiber
Off-cut collector / fiber bin		Pre-fitted / TR-FC8R
Automatic blade rotation		Provided
Lid opening angle		Switchable (Wide/Narrow)
Size*2		58(W)×98(D)×49(H) mm
Weight		Approx. 260 g
Field replaceable blade		Yes, use FCP-20BL(7R)
Operating condition		-10~50 degree C and 0~95% RH (non-condensing)
Storage condition		-40~80 degree C and 0~95% RH (non-condensing)
Blade life*3		60,000 fibers (2,500 fibers × 24 positions)

*1 With use of the single fiber adapter.

*2 A projection region is excluded.

*3 Blade life is not guaranteed. It may vary depending on the operational environment.

Standard package

Part name	Part No.	Unit	Qty
Optical fiber cleaver	S-70	pc	1
Carrying case	CC-8RH	pc	1



S-70



CC-8RH

Optional accessories / Consumables

Part name	Part No.	Unit	Qty
Single fiber adapter*4	AP-FC7(A)	pc	1
Fiber bin*4	TR-FC8R	pc	1
Replacement blade	FCP-20BL(7R)	pc	1

*4 Included as a standard package item.




AP-FC7(A)



TR-FC8R



FCP-20BL(7R)

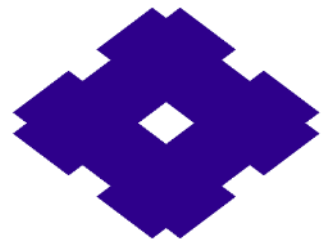

**SUMITOMO
ELECTRIC**

Connect with Innovation

<https://global-sei.com/>